



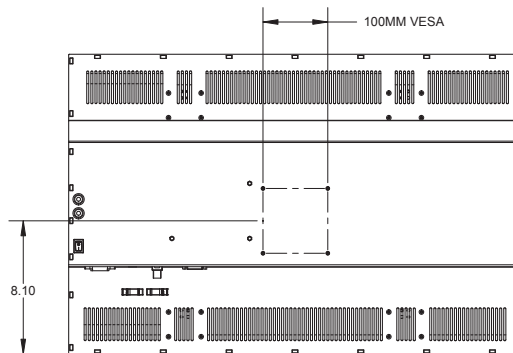

CF-30

30" Ruggedized LCD Touch Monitor

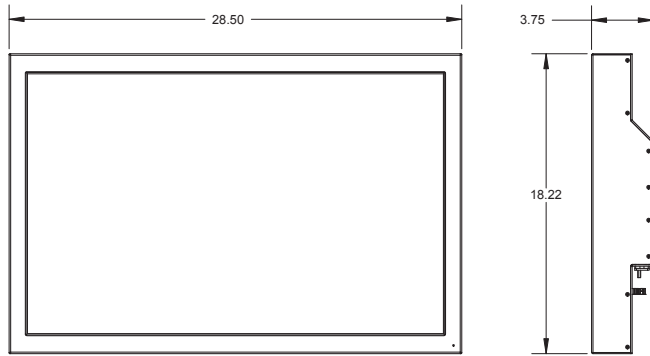

SPECIFICATIONS

LCD Panel Type: IPS
Resolution:
2560 pixels(H) x 1600 lines(V)
Aspect Ratio: 16:10
Active Display Area:
641.28mm(H) x 400.80mm(V)
Displayable Color:
16.7M colors 8Bit
Pixel Pitch:
0.2505mm x 0.2505mm
Front Filter:
3mm Polycarbonate AR

Maximum Visible Angle:
178°/178°
Response Time:
8 msec (GTG)
Brightness:
300cd/m²
Constant Ratio: 1000:1
Video Signal: DVI-D (Dual Link)
Power Consumption:
120W Max, 5W Power Save Mode
Dimensions:
28.5" W x 18.2" H x 3.9" Depth

Touchscreen Options:

- Infrared
- Resistive
- Surface Acoustic Wave
- USB Interface or Serial

Power: (AC Power)
100~240V, 50~60Hz (400Hz Optional)
Compliance: FCC, CSA, CE
(461-F Optional)
VESA: 100mm x 100mm
Weight: 30lbs.